


FRONT ACCESSORY POWER SUPPLY SOCKET

ENTERTAINMENT

11. Front Accessory Power Supply Socket

A: REMOVAL

- 1) Disconnect the ground cable from battery.
- 2) Remove the center panel. <Ref. to ET-5, REMOVAL, Radio Body.>
- 3) Disconnect the harness connectors and remove front accessory power supply socket.

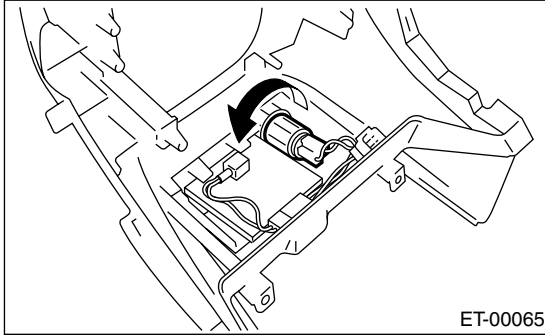

B: INSTALLATION

Install in the reverse order of removal.