CAUTION:

- Move vehicle very gently.
- Do not squirt strong hose stream on vehicle.
- 11) Spontaneous drying:

After completing all operations, leave vehicle alone for 24 hours.

CAUTION:

When delivering vehicle to user, tell him that vehicle should not be subjected to heavy shocks for at least three days.


12) Install cowl panel and wiper arm.

6. Rear Window Glass

A: REMOVAL


1. SEDAN AND COUPE MODEL

- 1) Remove roof molding.
- 2) Remove rear window molding upper and lower.
- 3) Disconnect connector from rear defogger terminal.
- 4) Remove glass in same manner as in wind-shield.



NOTE:

A matching pin is cemented to the corners of glass on compartment side. Use a piano wire when cutting each pin.



2. WAGON MODEL

NOTF:

It is impossible to remove the molding from the glass. If molding is broken, replace rear glass.

- 1) Remove rear wiper and rear gate trim.
- 2) Disconnect connector from rear defogger terminal.
- 3) Remove high mount stop light.
- 4) Remove glass in same manner as for wind-shield.


CAUTION:

Be careful not to damage molding re-installing the old rear window glass using a piano wire.

SERVICE PROCEDURE

NOTE:


A matching pin is cemented to corners of glass on compartment side. Use a piano wire when cutting each pin.



B: INSTALLATION

1. SEDAN AND COUPE MODEL


- 1) Install glass in same manner as in windshield.
- 2) Firstly, press-fit molding upper, then lower and lastly, roof molding.

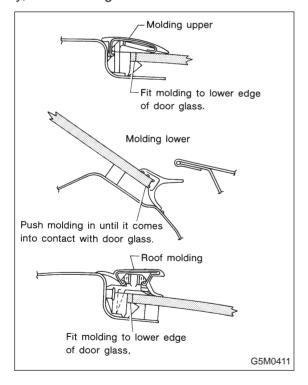

- 3) After installation, test for water leakage after about one hour, and leave vehicle alone for 24 hours.
- 4) Make rear defogger connections.

2. WAGON MODEL

- 1) Install rear gate trim.
- 2) Install glass in same manner as windshield.

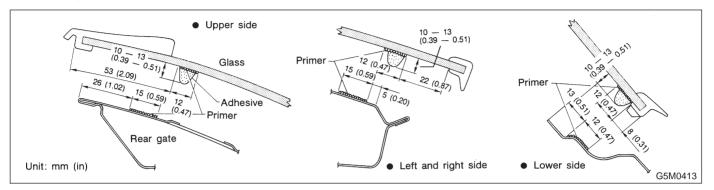

- 3) About one hour after installation, test for water leakage. Leave vehicle for 24 hours before using it.
- 4) Connect rear defogger connections.
- 5) Install high mount stop light and rear wiper.