


1. Tire and Wheel Size

1. Tire and Wheel Size

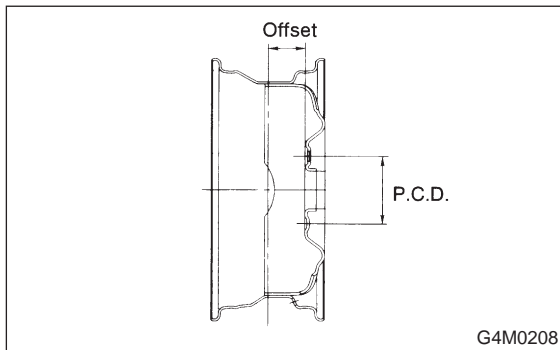

Model		Front and Rear				Spare		
		Tire size	Rim size	Rim offset mm (in)	P.C.D. mm (in)	Tire size	Rim size	Rim offset mm (in)
2200 cc	COUPE SEDAN WAGON	P195/60R15 87H	15 × 6JJ	55 (2.17)	100 (3.94) dia.	T135/70D16	16 × 4T	50 (1.97)
	OUT- BACK	P205/60R15 90S P205/60R15 90H						
2500 cc	COUPE	P205/55R16 87V	16 × 7JJ	53 (2.09)	100 (3.94) dia.			

NOTE: "T-type" tire for temporary use is supplied as a spare tire.

2. Tire Inflation Pressure

Tire size	Tire inflation pressure kPa (kg/cm ² , psi)	
	Light load	Full load
P195/60R15 87H P205/60R15 90S P205/60R15 90H P205/55R16 87V	Ft: 220 (2.2, 31) Rr: 200 (2.0, 25)	
T135/70D16	412 (4.2, 60)	